

J&L Screen Cylinder Technology: Perforated Conventionals

Wide Product Selection. Custom Solutions. Any Application.


Satisfy your mill's perforated screen cylinder needs with a comprehensive variety of products from J&L Fiber Services. J&L offers a wide selection of hole sizes, contours and open areas to meet all applications.

Our Perforated Conventional Screen Cylinders offer many distinctive features:

- Industry-standard model offering
- Multiple contour offerings
- Wide variety of open areas
- 316L stainless steel
- One-piece construction
- Chrome plating
- 6mm-thick plates

4 Distinct Contour Offerings

J&L offers four basic contours: Smooth, Dimpled, V-Grooved and High-Performance Two-Plane depending upon the specific application. The following drawings detail these variations.

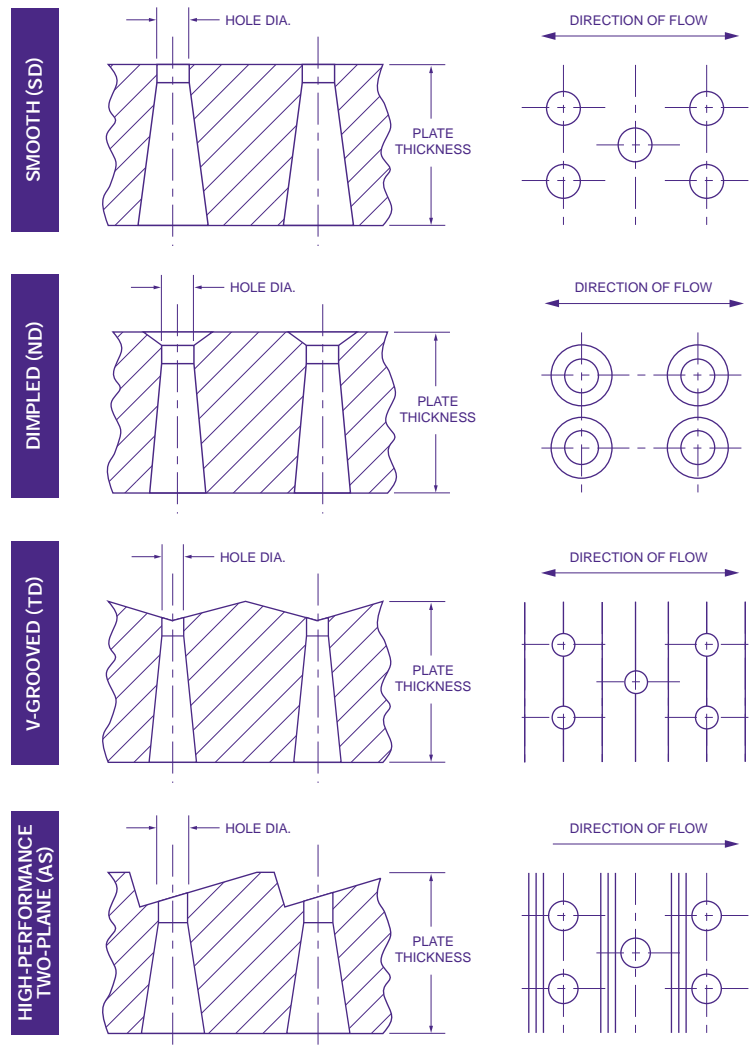

Available Hole Sizes & Types

13 available hole sizes
from 0.8 mm to 3.2 mm




Available open areas in J&L screen cylinders range from 8 to 25% depending upon each specific application. For more information on open areas available from J&L, refer to our Web site, www.jlfiberservices.com, to read our online "Optima" (Volume VI, Number III) or call 1-888-483-2655.

$$\frac{157.08 * (D)^2}{(X * Y)}$$

D = hole diameter

X = center spacing in horizontal direction

Y = center spacing in vertical direction

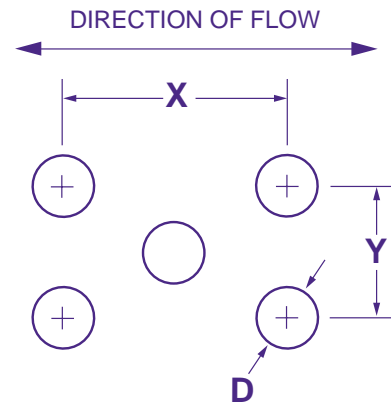

Your J&L Fiber Services applications team can recommend a perforated conventional screen cylinder to meet your specific mill requirements.